

3528 Flexistrip

IP65 Rated, 60 LEDs Per Metre




Product Description:

Description:	Product Code:	LEDs p/m	LED Spacing	Lumens (lm/m)	Wattage
IP65 3528 60 Red	DM-3528FS30RG-12R	60	16.67mm	95-135	4.8W p/m
IP65 3528 60 Green	DM-3528FS30RG-12G	60	16.67mm	135-180	4.8W p/m
IP65 3528 60 Blue	DM-3528FS30RG-12B	60	16.67mm	35-60	4.8W p/m
IP65 3528 60 Yellow	DM-3528FS30RG-12Y	60	16.67mm	95-135	4.8W p/m
IP65 3528 60 WW	DM-3528FS30RG-12WW	60	16.67mm	300-330	4.8W p/m
IP65 3528 60 PW	DM-3528FS30RG-12PW	60	16.67mm	270-300	4.8W p/m

Features:

- Easy to install and maintain with a long lifespan.
- Energy saving and environmentally friendly.
- Very Flexible, easy curved and available in various colours.
- Wide beam angle.
- LED strip on flexible printed circuit board with self adhesive backing.
- Each unit of 3 LEDs can be cut in segment without damaging the remaining strip.

Product Detail:

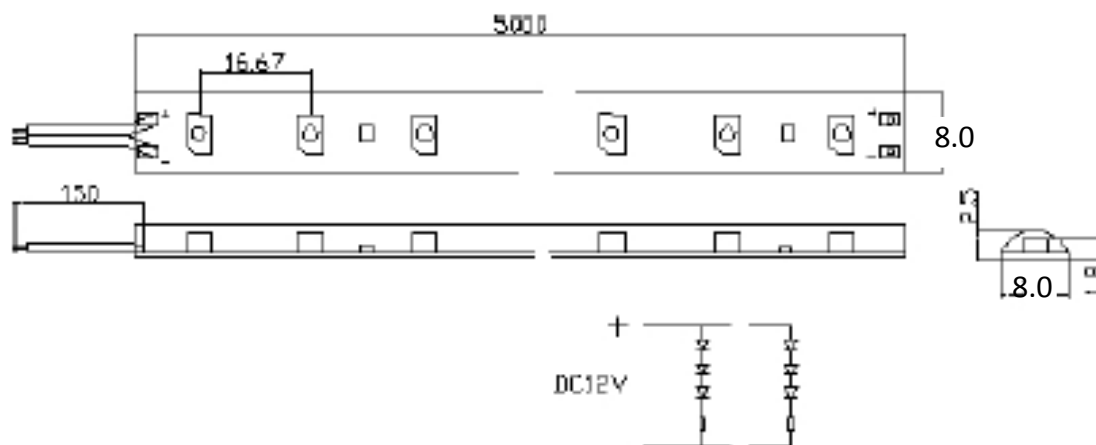

Reel length:	5m
PCB Thickness:	0.25mm
PCB Material:	Polymide
Beam Angle:	120
Life Span:	50,000Hs
Storage Temperature:	Minus 40 to 80 degrees.
Maximum power per roll:	24W
Maximum connection length:	5m
Certification:	CE/ROHS
Operating temperature:	Minus 30 to 60 degrees.
Operating voltage:	12DC

 12V	 Approx. life span 50,000 hours	 5m reel	 CRI >70
 Certification: CE RoHS compliant	 Beam Angle 120°	 2 year warranty	 Single Chip:

